




radianweapons.com

Scan QR code, review insert card, or  
visit us online at:



FOR GLOCK™ G19™ GEN3®, GEN4®, & GEN5®

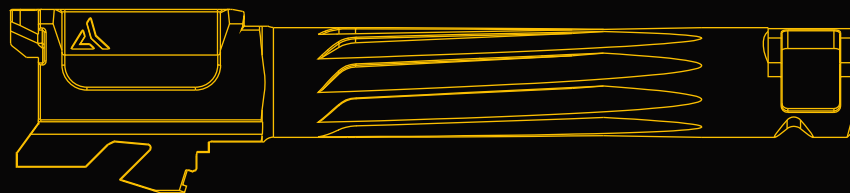

INTRA-LOK™

#### INSTALLATION

Remove the magazine, visually inspect the chamber to ensure the pistol is clear. Remove slide from frame per original manufacturer's instructions. Remove recoil spring assembly and existing barrel. Add light coating of oil to Radian barrel exterior and barrel hood. Install Radian barrel into slide and reinstall recoil spring. Reinstall the assembled slide back onto the frame. Test function to complete installation.


#### CLEANING

The inside of the barrel bore should be cleaned just like any other pistol barrel, using a cleaning patch or bore snake. If you anticipate a high round count, we suggest coating the barrel-to-compensator interface before installing the Afterburner on the Ramjet with heat-resistant gun oil to prevent carbon lock.

### INSTALLATION

Remove the magazine, visually inspect the chamber to ensure the pistol is clear. Remove slide from the frame per original manufacturer's instructions. Remove recoil spring and barrel. Add light coating of oil to Radian barrel exterior and hood. Install barrel into slide and reinstall recoil spring. Slide compensator over the barrel, tighten tapered screw to 15 in.-lb. Reinstall the assembled slide onto frame. Test function to complete installation.

FOR GLOCK™ G19™ GEN5\*

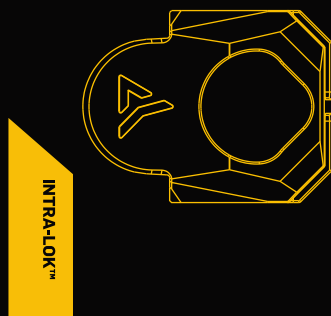

### CLEANING

If the compensator becomes carbon locked to the barrel, submerge the compensator and barrel in Hoppe's 9 overnight to break free.




Scan QR code, review insert card, or visit us online at:

[radianweapons.com](http://radianweapons.com)

### INSTALLATION

Remove the magazine, visually inspect the chamber to ensure the pistol is clear. Remove slide from the frame per original manufacturer's instructions. Remove recoil spring and barrel. Add light coating of oil to Radian barrel exterior and hood. Install barrel into slide and reinstall recoil spring. Slide compensator over the barrel, tighten tapered screw to 15 in.-lb. Reinstall the assembled slide onto frame. Test function to complete installation.

FOR GLOCK™ G19™ GEN4®



### CLEANING

If the compensator becomes carbon locked to the barrel, submerge the compensator and barrel in Hoppe's 9 overnight to break free.




Scan QR code, review insert card, or visit us online at:

[radianweapons.com](http://radianweapons.com)

### INSTALLATION

Remove the magazine, visually inspect the chamber to ensure the pistol is clear. Remove slide from the frame per original manufacturer's instructions. Remove recoil spring and barrel. Add light coating of oil to Radian barrel exterior and hood. Install barrel into slide and reinstall recoil spring. Slide compensator over the barrel, tighten tapered screw to 15 in.-lb. Reinstall the assembled slide onto frame. Test function to complete installation.

FOR GLOCK™ G19™ GEN3®



### CLEANING

If the compensator becomes carbon locked to the barrel, submerge the compensator and barrel in Hoppe's 9 overnight to break free.



Scan QR code, review insert card, or visit us online at:

[radianweapons.com](http://radianweapons.com)